




# Assembly Instructions

Aston Styling Chair  
Model #2816

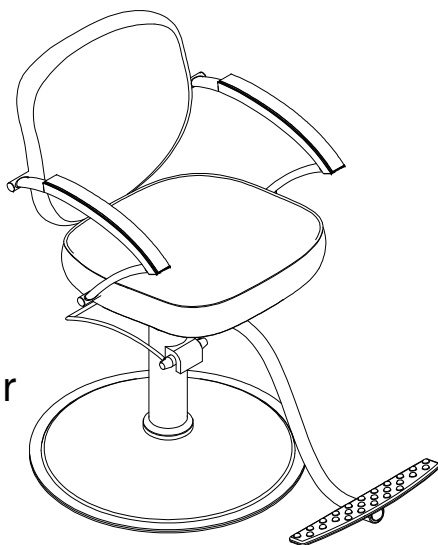


①


! ALWAYS KEEP HYDRAULIC BASE UPRIGHT.  
THE HYDRAULIC SHOULD NEVER BE  
TURNED UPSIDE-DOWN !

- 1) Locate the base with attached hydraulic foot pump (A) and remove the two bolts holding on the small cushion.
- 2) Discard the cushion and bolts.

- 3) Place the chair(B) on top of the base and hydraulic(A) so that the chair fits into the indentation on the hydraulic and secure the chair by pushing the chair down with force.
- 4) Make sure that the higher end of the bracket on top of the hydraulic is in the front.

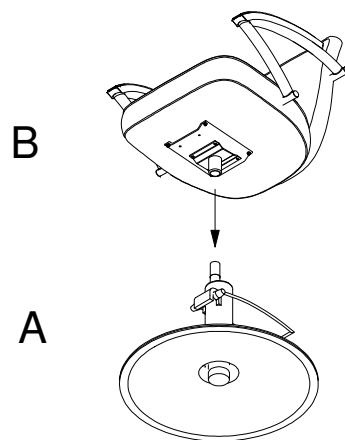

Lever straddles  
the hydraulic

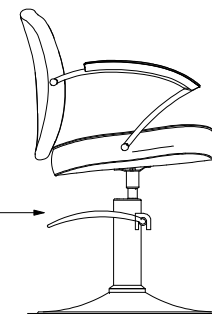

## PARTS LIST\*

Part	Qty.	Description
A	1	Base and hydraulic
B	1	Chair top
C	1	Footrest
D**	2	Bolt + washer + lock washer

\*Open all boxes to check for parts before beginning assembly.

\*\*All bolt/washer sets are already in the brackets and footrest.


Tools required:

Allen wrench (included)



②


- 1) Position the footrest so that the two front bracket holes on the chair are in line with the two holes in the bracket of the footrest(C).
- 2) Insert two bolts into the holes as shown.

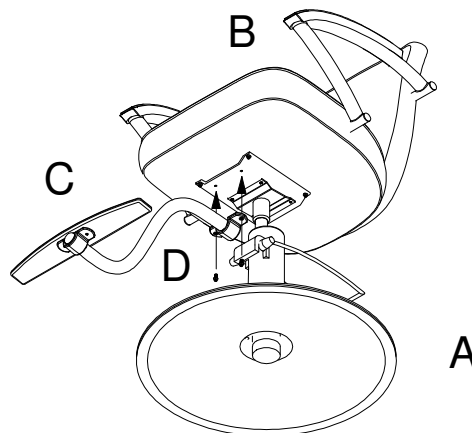

A

③

- 1) Chair is assembled.

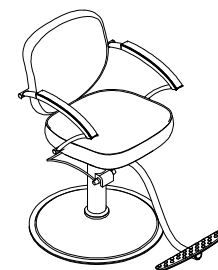

## !! Safety and Precautionary Information !!

- Place the chair on a FLAT and LEVEL surface.
- Confirm that the chair hydraulic is at the lowest setting before customer use.
- Operator should always assist customer when entering and exiting the chair.
- DO NOT step or stand on the footrest. This can cause the chair to tip over.
- Footrest is optional.

Failure to follow these instructions could result in injury.

Depending on what method of shipping your order requires, the chair bottoms may arrive in various states of required assembly. Some may have detached seat brackets and/or bases.

When you take it out of the box make sure to check EVERYWHERE inside so you don't throw anything away.

If your chair comes without the bracket attached, slide the bracket and tap firmly onto the hydraulic piston.

Screw the bolt that came with the bracket through the top of the bracket into the threads of the piston below.



If your chair comes with a detached base, attach the base as shown below.


The flat square and circle bases should come with four bolts, the raised circle base should come with six bolts, and the five star base should have one long bolt and a large washer.

Make sure all bolts are fully tightened to ensure the chair is secure and does not wobble.




If the pieces shown on this page come already attached, disregard these instructions.

Flat Square

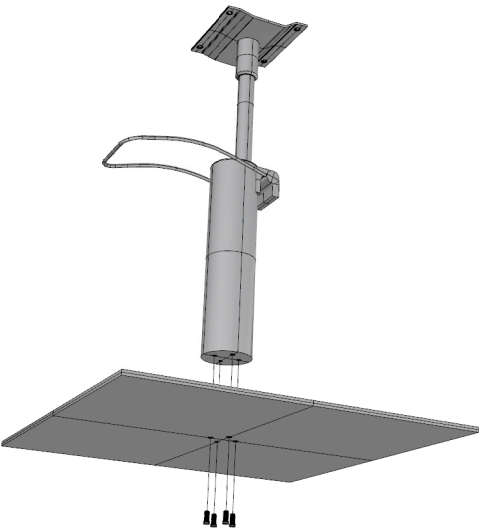


Four Bolts\*

Flat Round

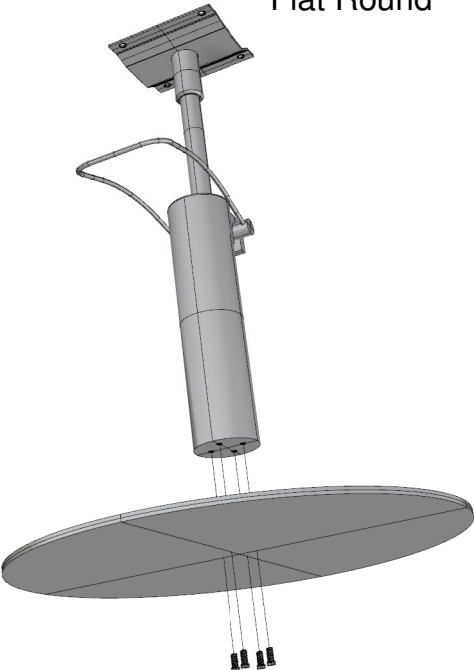


Four Bolts\*

Raised Round

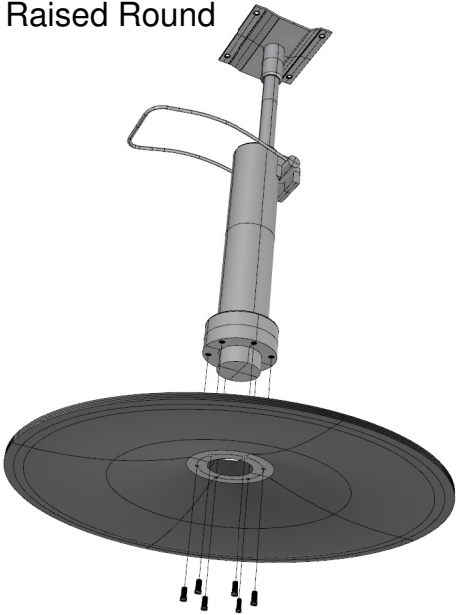

Six Bolts\*

Five Star

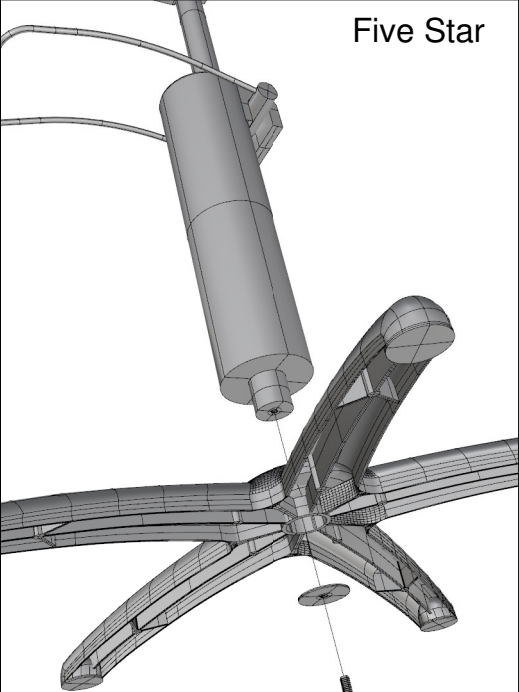

One Bolt\*