




Assembly Instructions

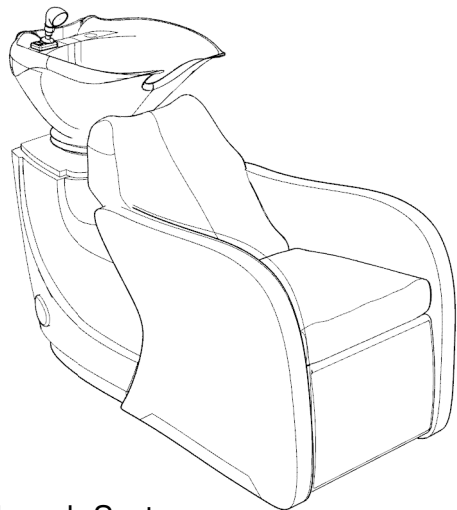

Avery Backwash System
Model #5979


Parts List

Part	Qty.	Description
A	1	Chair
B	1	Chair back
C	1	Shampoo Bowl
D	1	Base
E	1	5mm Allen Wrench
F	1	6mm Allen Wrench
G	4	Washers
H	2	Allen Screws
I	2	Screws
J	2	Expansion/Concrete Bolts

- Remember to check all bags and boxes for parts before beginning the assembly process.


- A licensed plumber must perform all installation for plumbing and all plumbing related equipment. Failure to do so will result in the warranty being voided. Documentation must be provided to Minerva Beauty, Inc. for all plumbing related warranty issues. At no time should any product containing bleach or barbcide be used to clean or sanitize any of the shampoo sinks. Such products may cause the breakdown of seals and result in leaking.

Step 1
Attach Chair Back (B) to Chair (A) using included Allen Screws (G). It may be helpful to gently turn the entire unit upside down to tighten the screws.

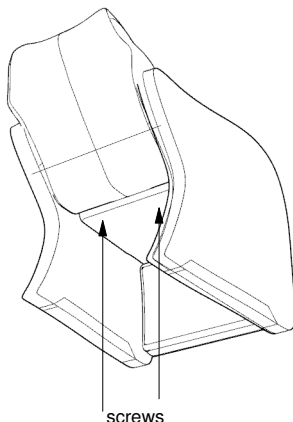


Step 2
Remove brackets from base and attach to rear of chair using included Allen Screws and Washers. When detaching brackets from base, save washers and bolts for use in step 3.

Step 3
Attach chair to base using same brackets, screws, and washers from step 2. The brackets will be screwed into both the rear of the chair and to the base. Make sure and tighten the screws.

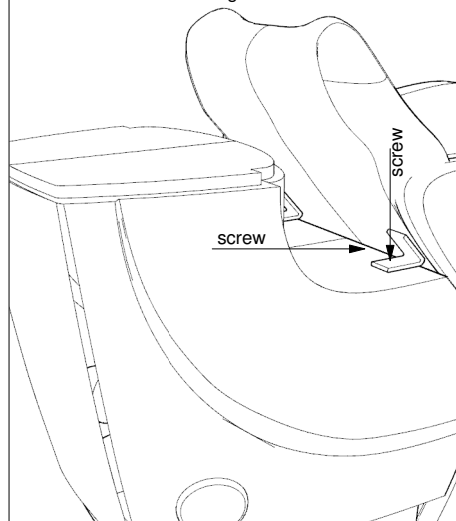

Step 4
With the bowl upside down, remove the nuts and washers attached to the tilting mechanism on the Shampoo Bowl (D). Invert the bowl and position it onto the Base (E) so that the bolts and springs line up with their designated cut-outs. Replace washers, ensuring square washers are facing front and back, and round washers on each side. Tighten nuts to complete bowl attachment.

Step 5
Insert the drain assembly into the bowl. Replace the back cover

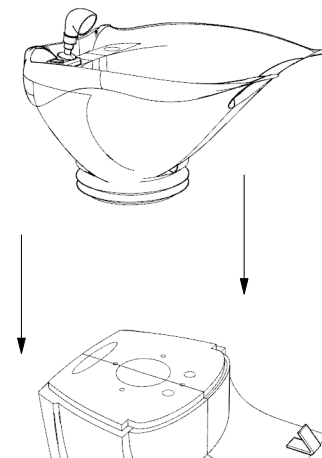

Congratulations!

Your Avery Backwash Shampoo System is now ready for your licensed plumber to install the faucet valve.

*Note: Now that you have put everything together and had the plumbing installed, we recommend that you bolt the chair to the floor using the included screws. This will help prevent future wear and tear.

